KEESUN
麒 新 弘 泽

Cable
RF10113 Datasheet

Cable Services

Version:1.0

Date: 2026-03-17

Status: Released



Contents

1. Technical Specification 3


2. Network analyzer test ： VSWR 4

3.Antenna Size 5

1. Technical Specification

Cable	1.13 Coax Black Cable
Length (mm)	60
Connector 1	MHF1
Connector 1 Material	Gold
Connector 2	RP-SMA Female （11.0）
Connector 2 Material	Gold
Impedance	50Ω
VSWR	1.92(MAX)
Frequency Range	DC~6.0GHz
Insertion Loss	**Frequency Standard value(dB/1m)** 1.0GHz.....≦2.1dB 2.0GHz.....≦3.0dB 3.0GHz.....≦3.7dB 4.0GHz.....≦4.35dB 5.0GHz.....≦5.0dB 6.0GHz.....≦5.5dB


2. Network analyzer test—VSWR

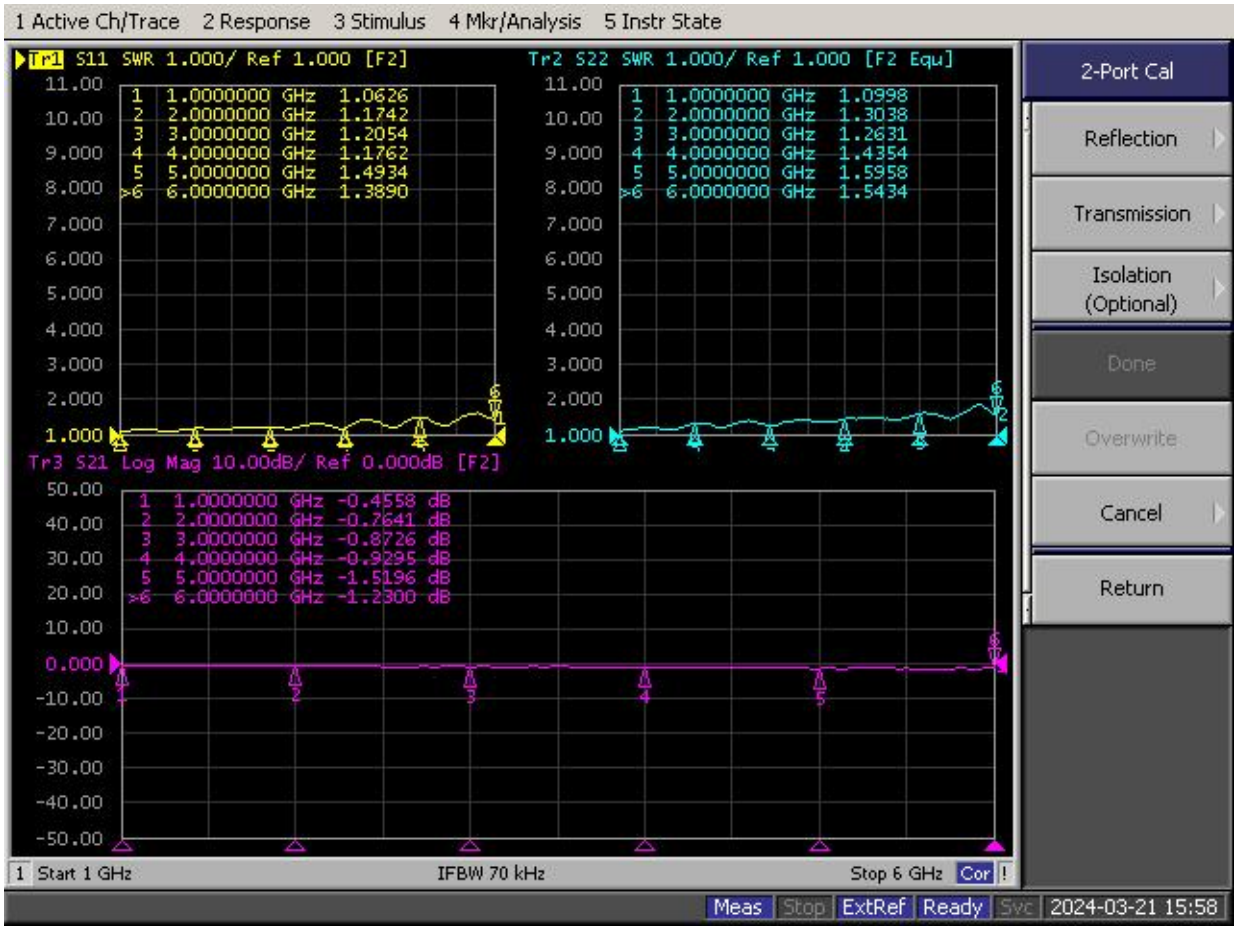



Product drwing


ROHS


REV.	Description	Date
A	New Release	2026.3.17



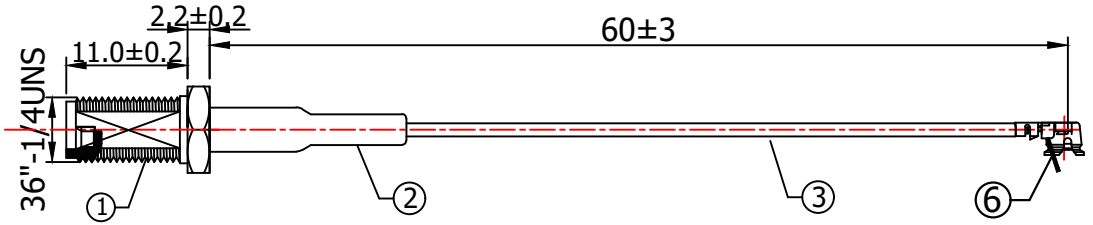








Pack:50pcs/Bundle 100pcs/bag



1.1PCS/ROHS label shall be affixed to the outer carton label
2.The outer carton shall be labeled with 1PCS/ outer carton on the upper right corner of the outer carton

Specification:
Frequency Rang:DC~6GHz
Impedance:50Ω
VSWR:1.92 or Less

NO.	DESCRIPTION		Q'TY	REMARK
6	Connector	MHF Plug for MI.13mm CABLE	1	MHF1
5	Nut	Brass,Gold-Plated	1	
4	Washer	Brass,Gold-Plated	1	
3	Cable	MI1.13 Black Cable,50 Ω	1	
2	H.S Tube	Heat Shrink Tube, φ3.5*15mm Black	1	
1	Connector	SMA Straight Jack/Reverse,Gold-Plated	1	WITH PIN

TITLE:	Coaxial Cable
P/N:	RF10113
CUSTOMER:	
DRAW NO.:	
DIMENSIONS TOLERANCES UNLESS OTHERWISE NOTED	

一般公差 TOLERANCE

.XXX	±0.1	XX.	±5
.XX	±0.5		
.X	±1.0		
X.	±3.0		

KEESUN
Shenzhen Keesun Technology Co.,Ltd

SHEET: 1/1	SCALE: NONE	APPROVED	
UNIT: mm	REV.A	CHECKED	
		DRAWED	Julia